

**Features:**

- Isolated mounting base 3000V~
- Solder joint technology with increased power cycling capability
- Space and weight saving

Typical Applications:

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

V_{DSM}, V_{RSM}	V_{DRM}, V_{RRM}	Type & Outline
900V	800V	DSKT90/08E-224H3/224H3B
1100V	1000V	DSKT90/10E-224H3/224H3B
1300V	1200V	DSKT90/12E-224H3/224H3B
1500V	1400V	DSKT90/14E-224H3/224H3B
1700V	1600V	DSKT90/16E-224H3/224H3B
1900V	1800V	DSKT90/18E-224H3/224H3B

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Single side cooled, $T_c = 85^{\circ}\text{C}$	125			90	A
$I_{T(RMS)}$	RMS on-state current		125			141	A
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			20	mA
I_{TSM}	Surge on-state current	10ms half sine wave	125			1.9	kA
I^2t	I^2t for fusing coordination	$V_R = 60\% V_{RRM}$				18.1	$\text{A}^2\text{s} \cdot 10^3$
V_{TO}	Threshold voltage		125			0.70	V
r_T	On-state slope resistance					3.01	m Ω
V_{TM}	Peak on-state voltage	$I_{TM} = 270\text{A}$	25			1.80	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM} = 67\% V_{DRM}$	125			1000	V/ μs
di/dt	Critical rate of rise of on-state current	Gate source 1.5A $t_r \leq 0.5\mu\text{s}$ Repetitive	125			200	A/ μs
I_{GT}	Gate trigger current	$V_A = 12\text{V}, I_A = 1\text{A}$	25	30		200	mA
V_{GT}	Gate trigger voltage			0.6		2.5	V
I_H	Holding current			10		250	mA
I_L	Latching current					1000	mA
V_{GD}	Non-trigger gate voltage	$V_{DM} = 67\% V_{DRM}$	125			0.2	V
$R_{th(j-c)}$	Thermal resistance Junction to case	Single side cooled per chip				0.28	$^{\circ}\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink	Single side cooled per chip				0.15	$^{\circ}\text{C}/\text{W}$
V_{iso}	Isolation voltage	50Hz, R.M.S., $t = 1\text{min}, I_{iso}: 1\text{mA}(\text{MAX})$		3000			V
F_m	Thermal connection torque(M5)			2.5		4.0	N·m
	Mounting torque(M6)			4.5		6.0	N·m
T_{vj}	Junction temperature			-40		125	$^{\circ}\text{C}$
T_{stg}	Stored temperature			-40		125	$^{\circ}\text{C}$
W_t	Weight				100		g
Outline	224H3、224H3B						

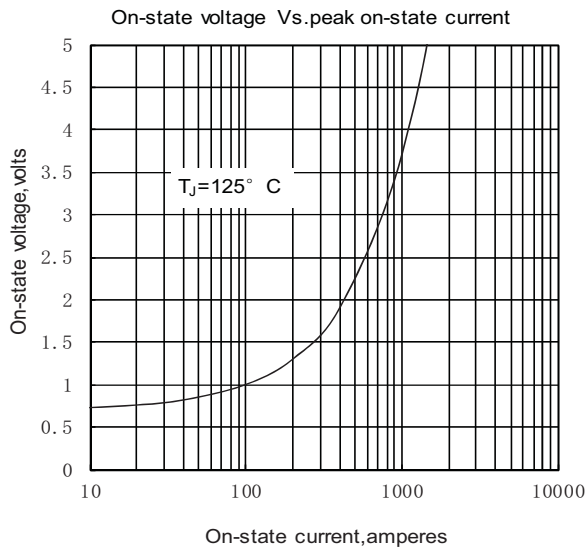


Fig1

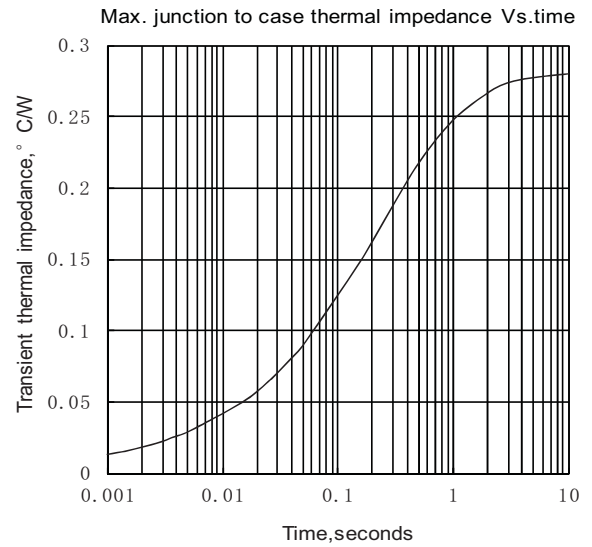


Fig2

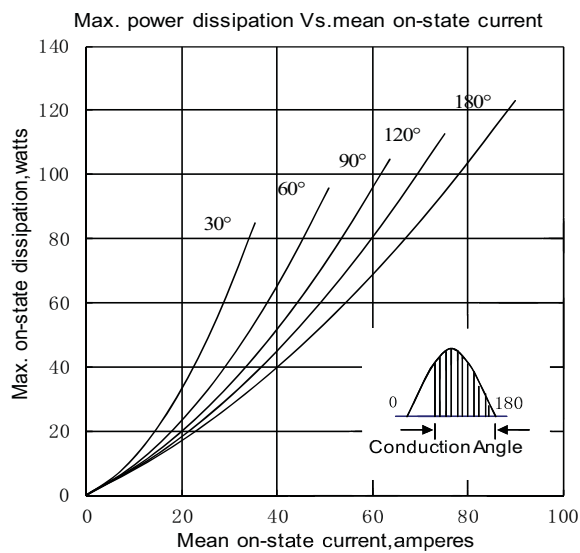


Fig3

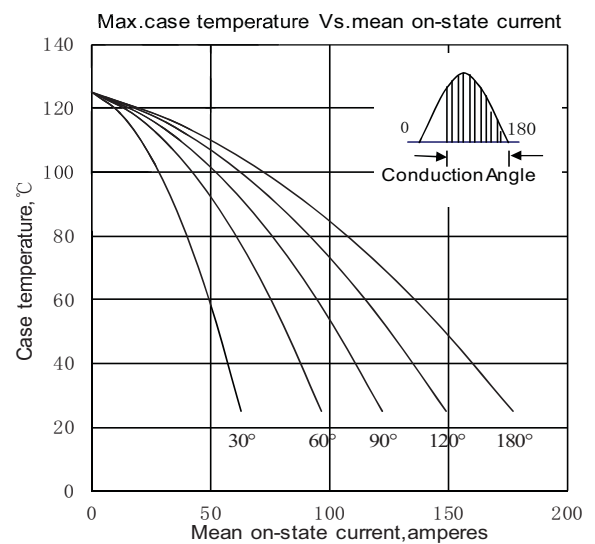


Fig4

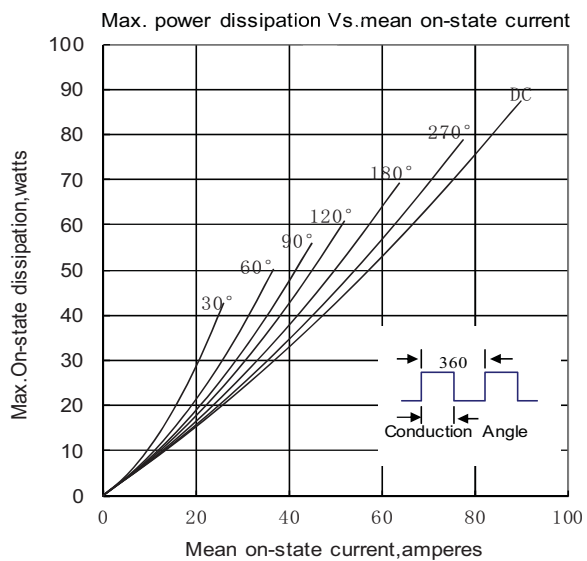


Fig5

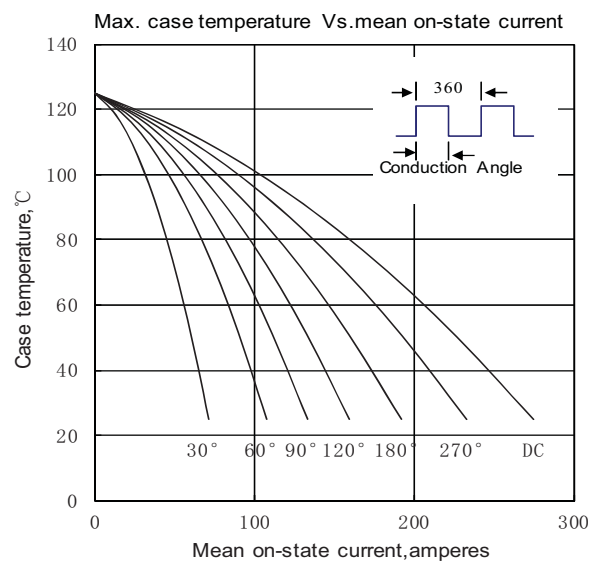


Fig6

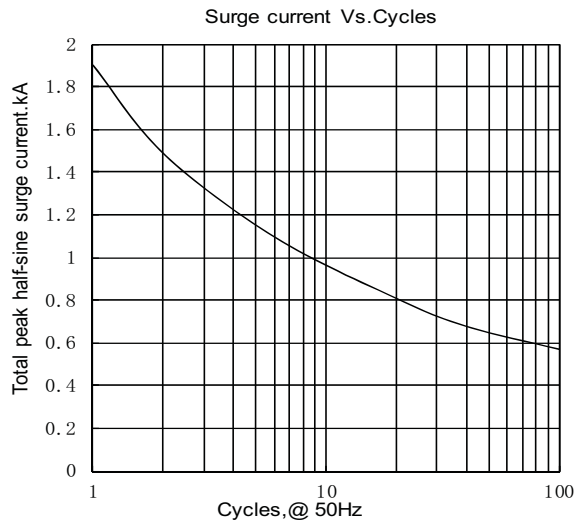


Fig7

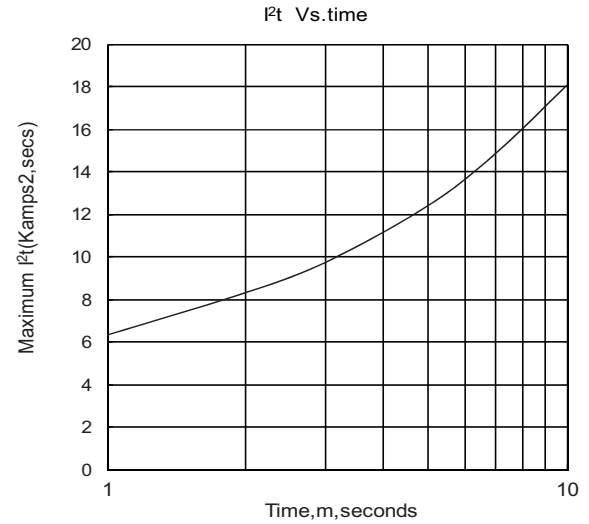


Fig8

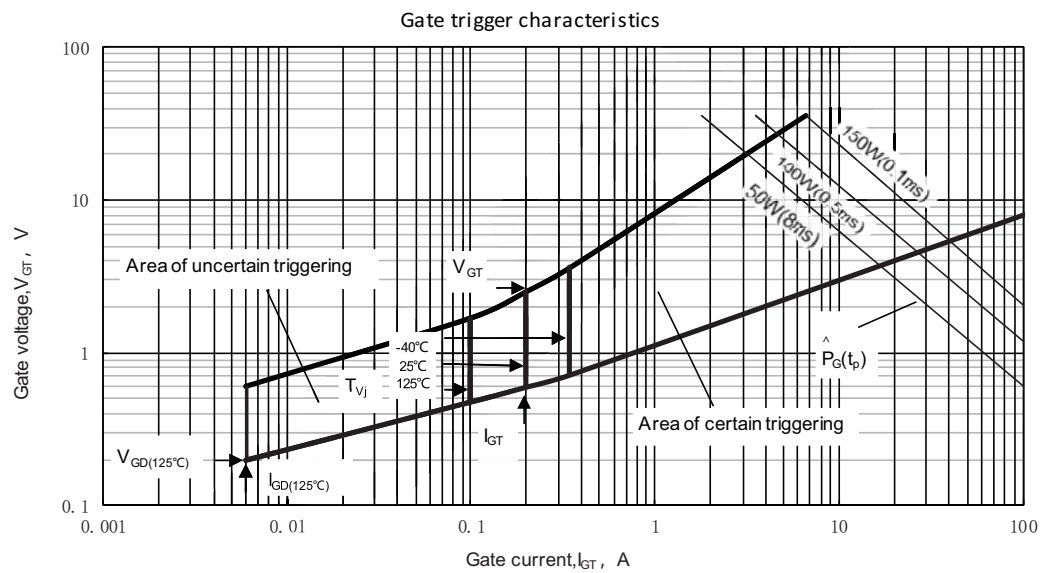
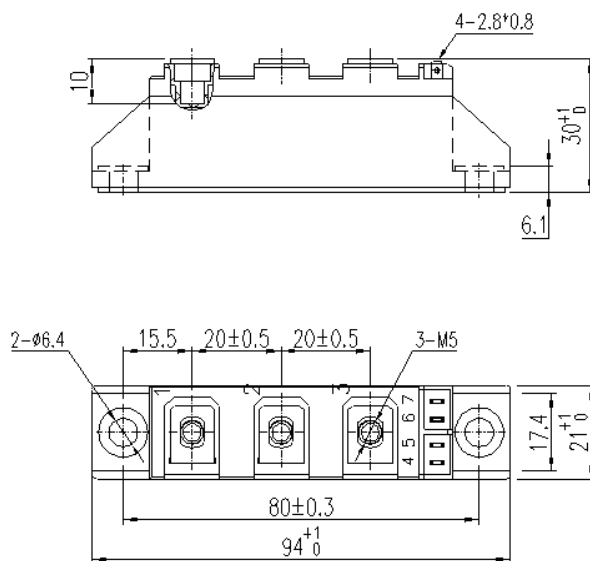


Fig.9

Outline:

Unmarked dimensional tolerance: $\pm 0.5\text{mm}$ 